



# PET Container Handling



## AIR DECK® with QuickSet® Guides Allows Quick Changeover For High Speed PET Conveying



**SINGLE FILE APPLICATION**



**MASS AIR ACCUMULATION**

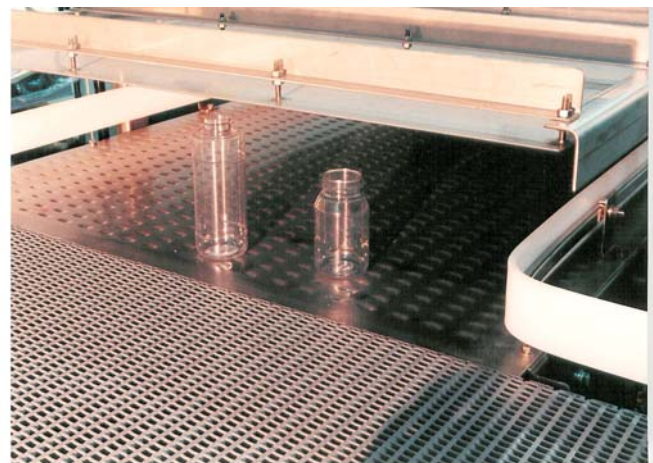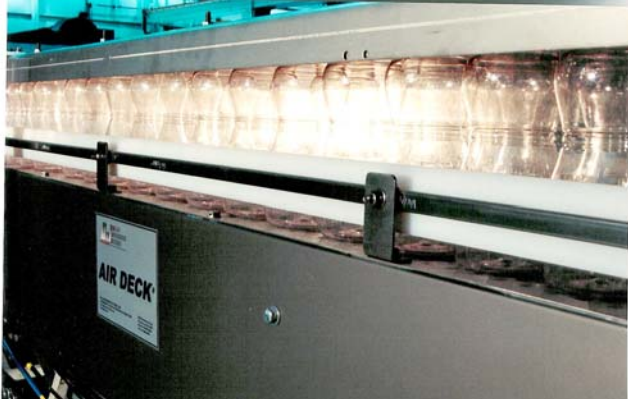

- AIR DECK® Conveyor with QuickSet® Guides accommodates PET containers ranging in heights from 5" to 12" tall @ rates up to 400 ppm.
- Using a hand crank, 50 feet of AIR DECK® conveyor can be adjusted in seconds.
- The QuickSet® Guides applied to mass air accumulation on AIR DECK® (720 3 1/2" diameter bottles on 60 feet of 16" wide conveyor) allow adjustment of 100 feet of conveyor in seconds, using a simple hand crank.

# Lowerator/Rinser

**High Speed Vertical Conveying • No Indexing • Adjustable Width**

- Pneumatic take-ups and low air pressure sensors maintain chain tension at idle end
- Stainless steel components compatible with wash down environment
- Nylatron wear strip permits operation without lubrication (under 150 fpm)
- Vacuum/filtration system
- Accepts containers from 3" - 4" diameter, 5" - 8" height range
- "Jam-Sensing" discharge guides
- Simpco Air Knife De-Ionizer
- Capable of rates up to 450 bpm
- Uses standard Rex attachment chain
- Motors located below product



DILLIN ENGINEERED SYSTEMS • A SUBSIDIARY OF DILLIN AUTOMATION SYSTEMS CORP.  
8030 Broadstone Road • Perrysburg, Ohio 43551 • Phone: 419-666-6789 • Fax: 419-666-4020  
[www.dillinautomation.com](http://www.dillinautomation.com) • e-mail : [des@dillin.com](mailto:des@dillin.com)